

The N30 Series

High-Performance Gear Pumps Built to Outlast, Outperform, and Drop-In Without a Single Modification.

■ Downtime, backorders, or compatibility issues?

The N30 Series is your direct-fit answer. Designed to replace **Commercial®**, **Parker®**, **Permco®**, and **Muncie®** models with zero guesswork. Built to **run cleaner, longer, and stronger** with cast iron durability and modern engineering.

Whether you're maintaining mobile equipment or building new systems, N30 offers **plug-and-play confidence**, faster delivery, and expert support to keep your operations running without disruption.

Feature	What It Means	Why It Matters
Direct-Fit Replacement	Compatible with major brands	Simplifies purchasing and installs faster
Up to 3000 PSI	Handles high-pressure tasks	Reliable in demanding systems
Fast Lead Times	Stocked and ready to ship	Avoid downtime or backorders
Flexible Mount/Shaft Options	SAE A, B, C / Splined, Keyed	Use in any system, new or retrofit
Backed by Experts	Tech support + 1-year warranty	Trusted long after installation



N30 Single Unit - Compact and Tough



N30 Tandem Assembly - For Multi-Circuit Systems

Built for Work. Proven in the Field.

- Truck & Trailers
- Mining
- Forestry
- Construction
- Agriculture
- Marine
- Material Handling
- Mobile


Ready to Upgrade?

Contact us for a quote, drawings, or to request a sample unit.
No obligation. Just performance you can count on.



The N30 Series

N30 Model Code Information

N30 Model Code Information																			
1	2		3		4		5		6		7		8		9				
PUMP/MOTOR	TYPE		MOUNT FLANGE		SHAFT TYPE		Displacement	in 3/rev [cm ³ /rev]	GPM @ 1800 RPM	Inlet Port		Outlet Port		Port Position [Inlet - Outlet]		Direction			
P PUMP	A	SINGLE	00	Pad Mount	07	SAE C Spline 1-1/4 14T -Continental	05	0.98	7.64	N1	NPT	3/4"	N1	NPT	3/4"	RR	Rear-Rear	R	Clockwise
M MOTOR	B	TANDEM	05	6 Bolt Flange 3.25"	12	0.75" Straight Keyed-Continental Only		[16.1]		S1	SAE/ORB	-12/0.75"	S1	SAE/ORB	-12/0.75"	RS	Rear-Side	L	Counter-Clockwise
	C	CONTINENTAL	42	SAE B 4-Bolt	15	SAE B Straight Keyed 0.875"	07	1.48	11.6	S2	SAE/ORB	-16/1.00"	S2	SAE/ORB	-16/1.00"	SS	Side-Side	B	Bi-Directional
			78	SAE C 4-Bolt	25	SAE B Spline 7/8" 13T		[24.2]		S3	SAE/ORB	-20/1.25"	S3	SAE/ORB	-20/1.25"	SR	Side-Rear		
			94	SAE A 2-Bolt	30	SAE B Straight Keyed 0.88" x1/4"x3/8"	10	1.97	15.4	S4	SAE/ORB	-24/1.50"	S4	SAE/ORB	-24/1.50"				
			96	SAE B 2-Bolt type 2	43	SAE BB KEYED 1.00 x1/4"x3/8"x1-1/4		[32.2]		F1	Code 61 SF	-12/0.75"	F1	Code 61 SF	-12/0.75"				
			97	SAE B 2-Bolt	65	SAE B 13 Tooth Spline 0.875" TYPE 2	12	2.47	19.2	F2	Code 61 SF	-16/1.00"	F2	Code 61 SF	-16/1.00"				
			91	31/51 Piggy Back Mount	66	SAE B Straight Keyed 0.88" x1/4"x3/8"		[40.4]		F3	Code 61 SF	-20/1.25"	F3	Code 61 SF	-20/1.25"				
			92	76/61 Piggy Back Mount	67	SAE BB KEYED 1.00 x1/4"x3/8"x1-1/4	17	3.45	26.9	F4	Code 61 SF	-24/1.50"	F4	Code 61 SF	-24/1.50"				
					68	6 Tooth Spline 1.00"		[56.5]											
					95	SAE A 9 Tooth Spline 0.62"	20	3.94	30.7										
					98	SAE BB 15 Tooth Spline 1.00"		[64.6]											
							22	4.43	34.5										
								[72.6]											
							25	4.92	38.3										
								[80.7]											

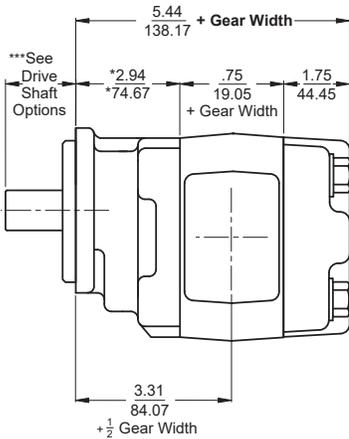

SINGLE UNIT

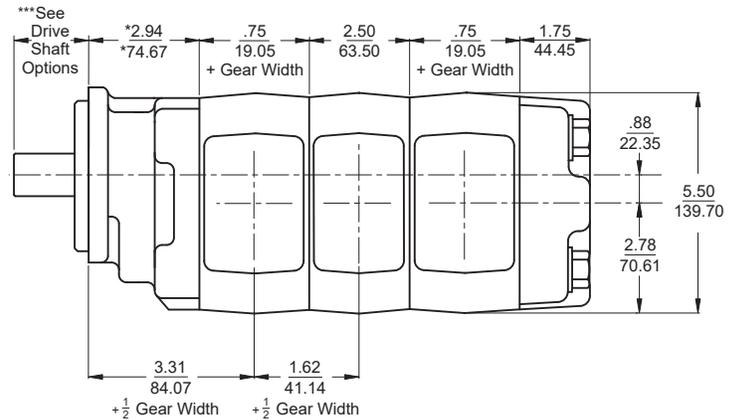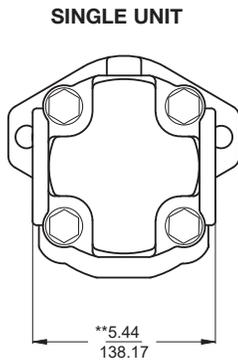

MULTIPLE UNIT

High-Performance Gear Pumps Built to Outlast

Direct-Fit Replacements

Drop-in alternatives for Commercial®, Parker®, Permco®, and Muncie®

Faster Lead Times

Stocked units ship quickly, cutting downtime and eliminating backorder delays.

Proven Durability

Backed by a 1-Year Manufacturer Warranty for peace of mind.

Cost-Effective Performance

Save up to 45% compared to OEM distributors without compromising quality.

Ready to Upgrade?

Contact us for a quote, drawings, or to request a sample unit.
No obligation. Just performance you can count on.